


**51 M² ÇIRAĞAN
KARMOD EV**



YAN CEPHE

ÖN CEPHE

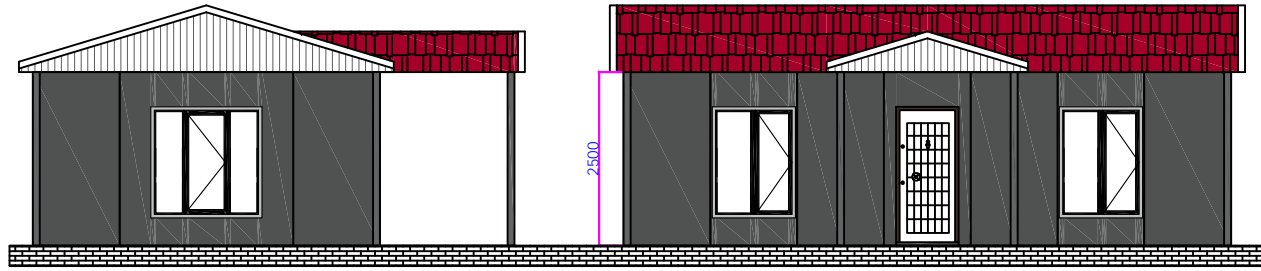


REV	1	SAYFANO	1/1
TARİH	17.01.2019		
ÇİZEN	M.İKBAL AKSAKAL		
KONTROL	M.İKBAL AKSAKAL		
ONAY	ABDULLAH YÜCEER		

NOTLAR	
P1 PENCERE	100/120
P2 PENCERE	120/160
P3 PENCERE	160/160
P4 PENCERE	180/120
P5 PENCERE	80/120
V1 VASİSTAS	60/40
V2 VASİSTAS	60/40

NOTLAR	
K1 DİŞ KAPI	100/200
K2 DİŞ KAPI	90/200
K3 DİŞ KAPI	90/200
K4 İÇ KAPI	84/200
K5 İÇ KAPI	75/200
K6 İÇ KAPI	75/200

BİNA YERİ	İSTANBUL	KAR YÜKÜ	80 kg/m ²
TEKNİK ÖZELLİKLER			
SİSTEM:	PRES	60	
DUVAR KALINLIĞI DİŞ:	100		
DUVAR KALINLIĞI İÇ:	2500		
YÜKSEKLİK			

BİNA ADI	ÇIRAĞAN	MÜŞTERİ ADI	KATALDG
BİNA ADEDİ	1	ALANI	49 M ² -m ²
REF.NO			M.İKBAL AKSAKAL

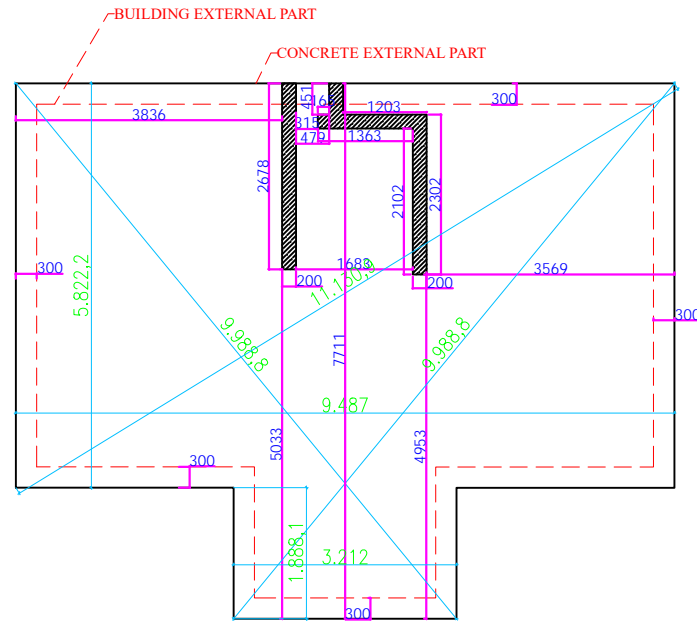

DESCRIPTIONS :

1 ATTENTION ! IMPORTANT!
In order to establish your house quickly and correctly You need to do concrete slab according to the specifications, dimensions and diameter we provide by using water balance. You may share with us high pixel clear picture for the concrete slab to have our comments.

2 RECOMMENDED SHAPE OF CONCRETE SLAB

3 ABOUT WATER DRAINAGE LEFT BLANKS
The hatched area should be left empty for waste water plumping as per dimension provided.

4 ABOUT CONCRETE SLAB
The dashed line indicates the exact measure of the building. If concrete slab is provided based on our recommendations and the cross (diagonal) dimensions then building can be placed perfectly. The drawings is 50 cm. bigger from building each size to create the prefabricated concrete plan.

5 DIFFERENT ALTERNATIVES
Based on the building plan, floor concrete beams can be prepared. For more information please call our technical department.

Minimum concrete slab thickness is 25 cm. It is recommended to reinforce with iron. Concrete slab must be on compact floor.



REV	1	SAYFANO	1/1
TARİH	17.01.2019		
ÇİZEN	M.İKBAL AKSAKAL		
KONTROL	M.İKBAL AKSAKAL		
ONAY	ABDULLAH YÜCEER		

NOTLAR		NOTLAR	
P1 PENCERE	100/120	K1 DİŞ KAPI	100/200
P2 PENCERE	120/160	K2 DİŞ KAPI	90/200
P3 PENCERE	160/160	K3 DİŞ KAPI	90/200
P4 PENCERE	180/120	K4 İÇ KAPI	84/200
P5 PENCERE	80/120	K5 İÇ KAPI	75/200
V1 VASİSTAS	60/40	K6 İÇ KAPI	75/200
V2 VASİSTAS	60/40		

BİNA YERİ	İSTANBUL	KAR YÜKÜ	80 kg/m ²
TEKNİK ÖZELLİKLER			
SİSTEM:	PRES	60	
DUVAR KALINLIĞI DİŞ:	100		
DUVAR KALINLIĞI İÇ:	2500		
YÜKSEKLİK			

BİNA ADI	ÇIRAĞAN	MÜŞTERİ ADI	KATALDG
BİNA ADEDİ	1	ALANI	49 M ² -m ²
REF.NO			M.İKBAL AKSAKAL